

WaterMaster 45 Evo

Direct gas fired condensing water heater.



- > Can deliver large peak and continuous volumes of hot water
- > Operates in most efficient mode (fully condensing)
- > Reduces legionella risk due to temperature stored at > 60°C
- > Small footprint allows installation in tight plantrooms
- > Low maintenance with no anode protection required
- > Compliant with latest Ecodesign regulations for DHW
- > Corrosion-resistant stainless steel heat exchanger and tank reduces maintenance and increases system lifespan
- > Suitable for vented or unvented systems (optional Systempak 3 unvented kit required. Kit includes 25l expansion vessel, tundish, pressure control valve, combined pressure reducing set, and vessel mounting bracket.)
- > Easy to use standardised controls using ACVMax control system
- > Compatible for use with LPG and natural gas
- > Supplied with factory fitted T&P relief valve for ease of installation
- > Improved access for service and maintenance
- > 5-year warranty*

Tank-in-tank technology

- > **Fast** heat up
- > **Rapid** recovery
- > **Reduced** footprint
- > **Reduced** scale
- > **Low** storage required
- > **Minimal** heat loss



ACV UK Ltd

St. David's Drive, St. David's Business Park, Dalgety Bay, Fife, KY11 9PF
uk.sales@acv.com | acv.com

*Terms & conditions available at www.acv.com/gb/warranties.

Technical data and dimensions




TYPE	UNIT	WM45 Evo
Part number		XB660003
Fuel		Natural gas
Input max (heating) HCV	kW	50.0
Input min (heating)	kW	9
Capacity (total)	L	196
Capacity (domestic hot water)	L	96
Efficiency at 100% load (gross) (EN89)	%	97.9
Efficiency at 100% load (nett) (EN89)	%	108.5
Efficiency at 30% load	%	103.1
Connection - DHW	Ø"	1 M
Connection - gas	Ø"	¾ M
Flue connection	Ømm	80/125
Water pressure drop boiler at Δt = 20°C	mbar	10
Gas flow rate (max output)	m³/h	4.67
Gas flow rate (min output)	m³/h	0.9
Max operating temperature	°C	87
Max service pressure heating (primary)	bar	3
Max service pressure (DHW)	bar	8.6
Weight (empty)	kg	177
Voltage	V	230
Pre-heating time from 10 to 80°C (Heat source: boiler)	min	23
Standby loss ΔT 30K	kWh/day	1.9
Standby loss ΔT 45K	kWh/day	2.98
Standby loss ΔT 30K	W	79
Standby loss ΔT 45K	W	124
Declared load profile		L
Water heating efficiency class		A
Water heating energy efficiency (EU 814/2013)	%	87.2
NOx class (EN15502)		6
NOx weighted (GCV) (EN15502)	mg/kWh	30.2
Sound power level indoors LWA (BSEN15036-1)	dB	59

Domestic hot water performance

TYPE	UNIT	WM45 Evo
Peak flow at 40°C	L/10'	451
Peak flow 1st hour at 40°C	L/60'	1610
Continuous flow at 40°C	L/h	1390
Peak flow at 45°C	L/10'	373
Peak flow 1st hour at 45°C	L/60'	1366
Continuous flow at 45°C	L/h	1192
Peak flow at 60°C	L/10'	224
Peak flow 1st hour at 60°C	L/60'	894
Continuous flow at 60°C	L/h	820

This data assumes an incoming mains water temperature of 10°C.

*In line with the recommendations specified in UK Building Regulations (2016) Part G, ACV UK Ltd advise the installation of a suitable domestic hot water thermostatic mixing valve on the hot flow immediately after the appliance.

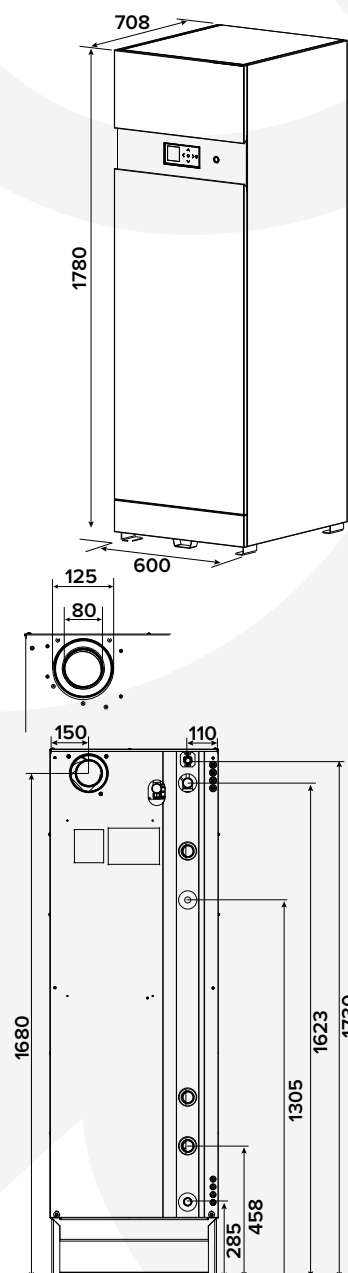

All dimensions in mm.

Clearances	(minimum)
Top	300mm
Left side	600mm
Right side	250mm
Rear	400mm

Every effort has been taken to ensure the details are accurate. ACV UK Limited does not, however, guarantee the accuracy or completeness of any information nor does it accept liability for any errors or omissions in the information. ACV UK Limited reserves the right to make changes and improvements which may necessitate alteration to product specification without prior notice.