

COMPACT CONDENS

170 - 210 - 250 - 300

HIGH OUTPUT GAS CONDENSING BOILER



EXCELLENCE
IN HOT WATER




COMPACT CONDENS

HIGH OUTPUT GAS CONDENSING BOILER FOR INDUSTRIAL APPLICATIONS

- Available in 4 power versions: 168/210/252/294 kW
- Compact dimensions
- Floor standing, compact footprint (0,8 m²)
- Cast aluminium heat exchanger and manifold
- 107,5% efficiency
- Maxsys regulation

CHARACTERISTICS

COMPACT CONDENS		170	210	250	300
Nominal Input	kW	168	210	252	294
Number of elements		5	6	7	8
Efficiency at 30% load (EN677)	%	107,5			
Operating pressure	bar	6			
Flue connection	Ø mm	200			
Dimensions	WxHxL mm	600x1180x1320			
Weight	kg	193	210	227	244

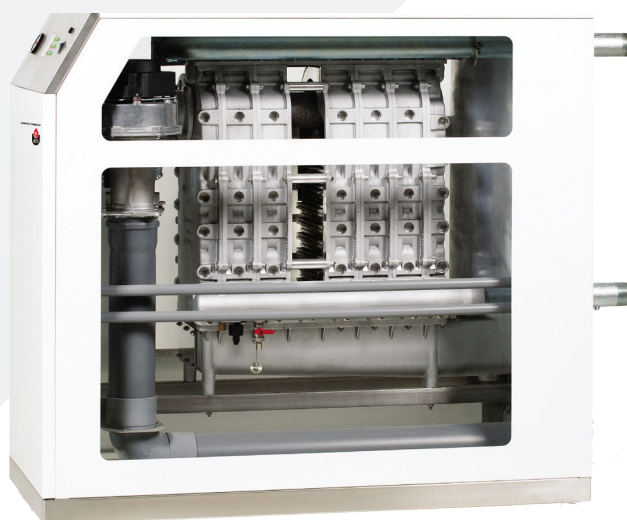

ACV International

Oude Vijverweg 6 - 1653 Dworp
international.info@acv.com

**EXCELLENCE
IN HOT WATER**

