

Brazed plate heat exchanger kit

900kW



Small installed
footprints



Suitable for a range
of ACV products



Bespoke spools
designed for connection
to Evo S cascade frame
and header kits



A complete system
separation solution



Low maintenance
and self-cleaning




Optimum heat
transfer

Technical specifications

900kW is the nominal capacity of the plate heat exchanger applying the operating temperatures and temperature differentials shown below.

Please contact ACV UK to confirm the expected performance if the operating conditions differ from those shown.

DIMENSIONS					
	A	B	C	D	E
DN100	330	865	526	200	960
DN150	330	905	520	200	960

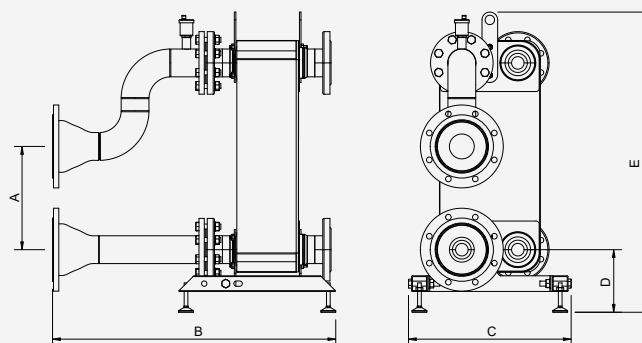

	UNITS	HOT SIDE (PRIMARY)	COLD SIDE (SECONDARY)
Mass flow rate	kg/s	10.8	10.8
Inlet temperature	°C	80	50
Outlet temperature	°C	60	70
Pressure drop	kPa	14.6	19.9
Heat exchanged	kW	900	
Heat transfer area	m ²	21.7	
Flow configuration		Countercurrent	
Number of plates / thickness		88 / 0.3 mm	
Number of passes		1	1
Pressure vessel code		PED	
Design pressure at 90.00 Celsius	Bar	19	19
Design pressure at 225.0 Celsius	Bar	15	15
Design temperature	°C	-196.0 / 225.0	
Overall length x width x height	mm	359 x 324 x 959	
Volume	L	28.0	17.9
Net weight, empty / operating	kg	75.8 / 121	

Standard materials

Cover plates	Stainless steel
Connections	Stainless steel
Plates	Stainless steel
Brazing	Copper

PLEASE NOTE: The plate heat exchangers are to be used for system separation only. They must not be used for the direct production of domestic hot water.

They should not be used for direct heating of swimming pool water where the chlorinated pool water would pass directly through the plate heat exchanger.

Connections

FRAME & HEADER	DN100
Standard Height Cascade	✓
Low Height Cascade	
SYSTEM	
DN25	
FLANGED	
PN6	

ACV UK Ltd

St. David's Drive, St. David's Business Park, Dalgety Bay, Fife, KY11 9PF
uk.sales@acvuk.com | acv.com/gb



Every effort has been taken to ensure the details are accurate. ACV UK Limited does not, however, guarantee the accuracy or completeness of any information nor does it accept liability for any errors or omissions in the information. ACV UK Limited reserves the right to make changes and improvements which may necessitate alteration to product specification without prior notice.